


Keysight 8494G/H, 8495G/H, 8496G/H Programmable Step Attenuators

Available new and used at
www.instruments4engineers.com

Data Sheet

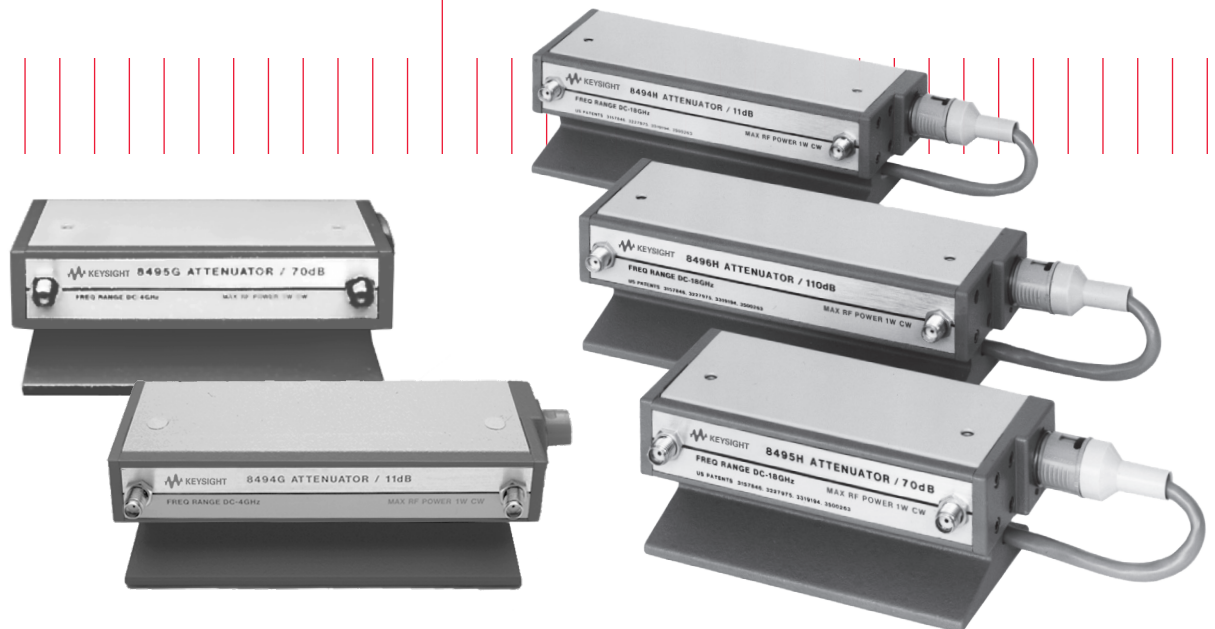

Address

Instruments 4 Engineers Ltd
Business & Innovation Centre
Broadstone Mill, Broadstone Road
Stockport SK5 7DL, United Kingdom

Contact

Tel: +44 (0) 161 871 7450
sales@instruments4engineers.com

www.instruments4engineers.com



Specifications describe the instrument's warranted performance. Supplemental and typical characteristics are intended to provide information useful in applying the instrument by giving typical, but not warranted performance parameters.

Specifications

Model number	Frequency	Attenuation range (dB)	Attenuation step	Insertion loss (dB) @ 0 dB	Maximum SWR	Max. input average power	Max. input peak power	Operating life (in million cycles/section)	Repeatability
8494G	DC to 4 GHz	0 to 11	1 dB	0.96	1.50	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8495G	DC to 4 GHz	0 to 70	10 dB	0.68	1.35	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8496G	DC to 4 GHz	0 to 110	10 dB	0.96	1.50	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8494H	DC to 18 GHz	0 to 11	1 dB	2.22	1.90	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8495H	DC to 18 GHz	0 to 70	10 dB	1.66	1.70	1 W	100 W	5	±0.03 dB max 5 million cycles per section
8496H	DC to 18 GHz	0 to 110	10 dB	2.22	1.90	1 W	100 W	5	±0.03 dB max 5 million cycles per section

RF Connector Options: 1) 849xG/H offers N(f)/SMA (f)/APC-7

Supplemental Specifications

Attenuation Accuracy: +/- dB (Reference from 0 dB)



8494G/H	8495G/H	8494G	8494H		8495G	8495H		8496G	8496H	
Attenuation Selection (dB)		DC to 4 GHz	DC to 12.4 GHz	12.4 to 18 GHz	DC to 4 GHz	DC to 12.4 GHz	12.4 to 18 GHz	DC to 4 GHz	DC to 12.4 GHz	12.4 to 18 GHz
1	10	0.2	0.3	0.7	0.2	0.5	0.6	0.2	0.5	0.6
2	20	0.2	0.3	0.7	0.4	0.7	0.8	0.4	0.7	0.8
3	30	0.3	0.4	0.7	0.5	0.9	1.2	0.5	0.9	1.2
4	40	0.3	0.4	0.7	0.7	1.2	1.6	0.7	1.2	1.6
5	50	0.3	0.5	0.7	0.8	1.5	2.0	0.8	1.5	2.0
6	60	0.3	0.5	0.8	1.0	1.8	2.4	1.0	1.8	2.4
7	70	0.4	0.6	0.8	1.2	2.1	2.8	1.2	2.1	2.8
8	80	0.4	0.6	0.8	-	-	-	1.3	2.4	3.2
9	90	0.4	0.6	0.8	-	-	-	1.5	2.7	3.6
10	100	0.4	0.6	0.9	-	-	-	1.6	3.0	4.0
11	110	0.5	0.7	0.9	-	-	-	1.8	3.3	4.4

How To Drive

Section Solenoid Coil	Section 1		Section 2		Section 3		Section 4		Power V+
	Thru-line	Atten Card	Thru-line	Atten Card	Thru-line	Atten Card	Thru-line	Atten Card	

¹ Five-foot cable and mating plug assembly provided.

² Pin 6 is common for all coils. Pin 1, 7, 8, 12 and 14 are not used.

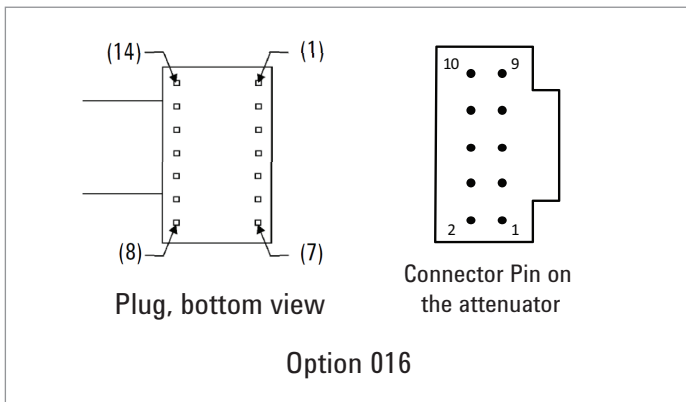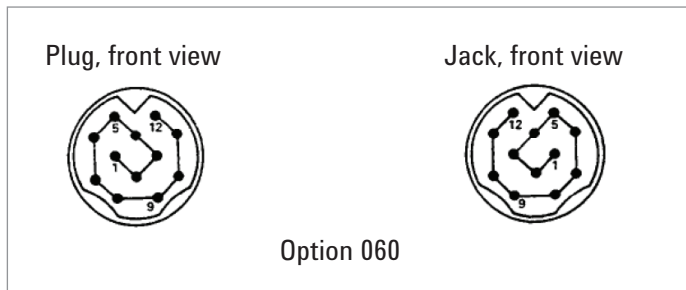

Ordering Information

Attenuation range	Option type	Option description
8494G/ 8494H/ 8495G/ 8495H/ 8496G/ 8496H/	001	N (f)
	002	SMA (f)
	003	APC-7
	024	24 Vdc
	011	5 Vdc
	060	12-pin Viking connector
	016	16-inch ribbon cable with 14-pin DAP plug
UK6	Commercial calibration test data with certifications	

Note: Option 003 is not available for 8495G



Address

Instruments 4 Engineers Ltd
Business & Innovation Centre
Broadstone Mill, Broadstone Road
Stockport SK5 7DL, United Kingdom

Contact

Tel: +44 (0) 161 871 7450
sales@instruments4engineers.com

www.instruments4engineers.com