



DG5000 series Waveform Generators

DG5000 is a multifunctional generator that combines many functions in one, including Function Generator, Arbitrary Waveform Generator, IQ Baseband Source/IQ IF Source, Frequency Hopping Source (optional) and Pattern Generator (optional). It provides single and dual-channel models. The dual-channel model, with two channels having complete equivalent functions and precisely adjustable phase deviation between the two channels, is a real dual-channel signal generator.

DG5000, adopting the Direct Digital Synthesizer (DDS) technology, can provide stable, precise, pure and low distortion signal. The user-friendly interface design and panel layout bring users exceptional experience. Besides, the remote control of the generator can be easily done through different standard configuration interfaces, which provides more solutions for users.

Authorised Distributor

INSTRUMENTS 4 ENGINEERS

Stockport Business & Innovation Centre
3rd Floor Broadstone Mill, Broadstone Road
Stockport, SK5 7DL United Kingdom
Tel +44 (0) 161 871 7450
sales@instruments4engineers.com

www.instruments4engineers.com


DG5000 series Waveform Generators




► Features and Benefits

- 4.3 inches, 16M true color TFT LCD.
- 350 MHz, 250 MHz, or 100 MHz or 70 MHz maximum sine output frequency, 1 GSa/s sample rate, 14 bits resolution.
- Single/dual-channel models. The dual-channel model supports frequency and phase coupling.
- The 16+2 channels digital output module (optional) together with the analog channel can rebuild the more mixed signals in daily practice.
- Support an external power amplifier (optional) that can be configured online.
- Support frequency hopping(optional) with hopping interval up to 80 ns and arbitrary editing frequency hopping patterns.
- 14 standard waveform functions: Sine, Square, Ramp, Pules, Noise, Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, Haversune, Lorentz, Dual Tones and DC.
- Rise/Fall Time of the Pulse could be adjusted separately.
- Enable to edit arbitrary waveform up to 512 kpts and output arbitrary waveforms up to 128 Mpts.
- Support AM, FM, PM, ASK, FSK, PSK and PWM modulations.
- Support user-defined IQ vector signal modulation and IQ baseband/IF source output.
- Support Frequency Sweep and Burst output.
- Abundant I/O: waveform output, synchronous signal output, modulation input, 10 MHz clock input/output, trigger input/output.
- Enable to store and recall waveform data and instrument state, and support versatile file types.
Standard configuration with 1 GBytes flash memory.
- Plenty of standard interfaces: double USB Hosts, USB Device, LAN, and GPIB (IEEE-488.2).
- Seamlessly interconnected with RIGOL USB-TMC digital oscilloscopes for loading and reappearing waveforms.
- Support USB flash device storage for FAT files.
- Support PictBridge printer.
- Provide security lock hole.
- Support remote control through 10/100M Ethernet web.
- Conform to LXI-C instrument standards (Version 1.2).
- Provide Chinese and English built-in help and input methods.
- Provide powerful waveform editing PC software.


Advanced functions

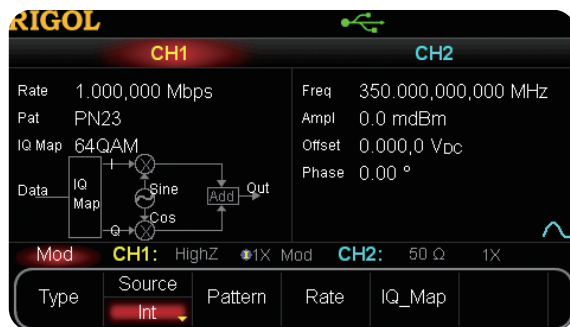


IQ Modulation

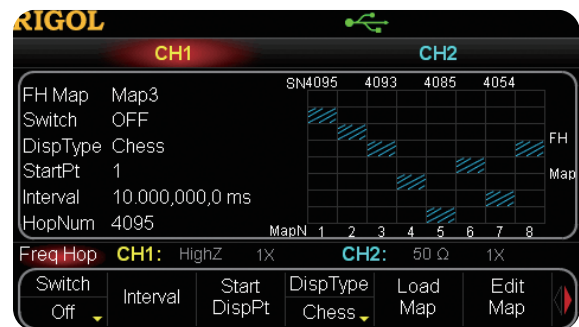


Frequency Hopping

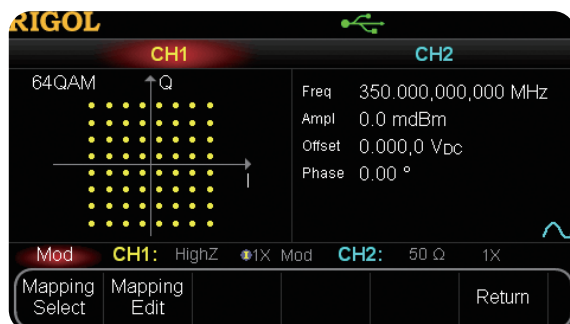


IQ Mapping Selection

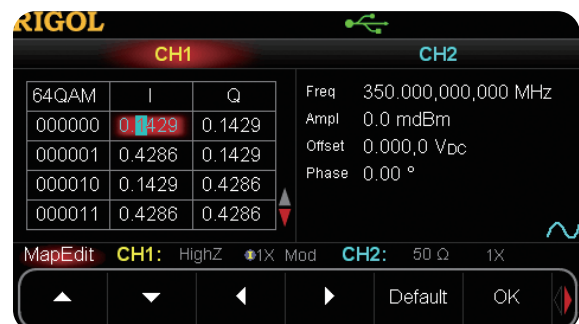


IQ Mapping Edit

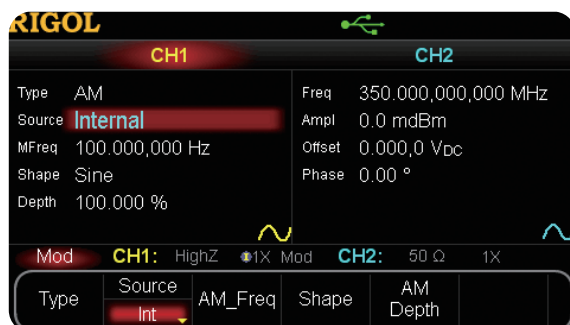


AM

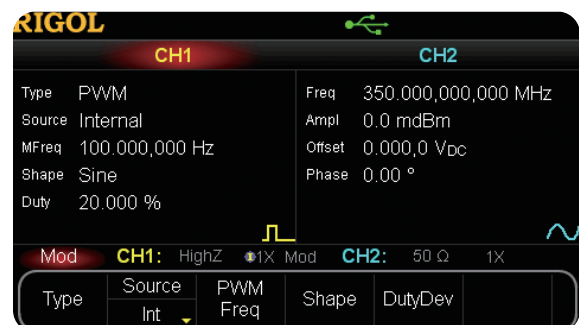


PWM

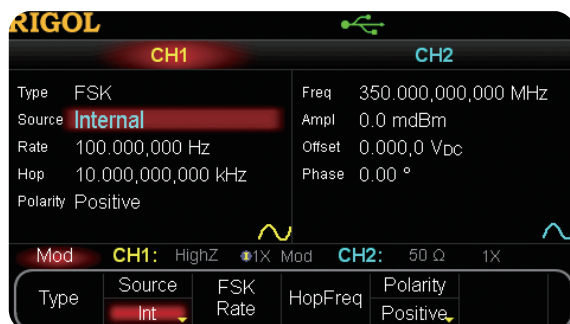


FSK

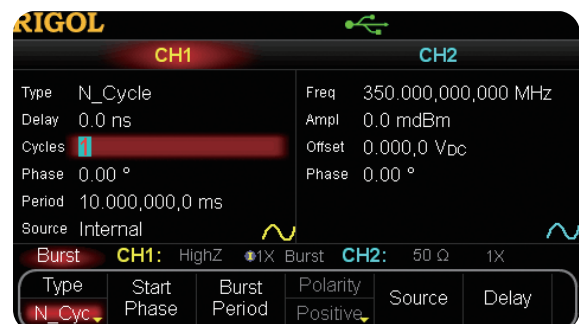

Burst

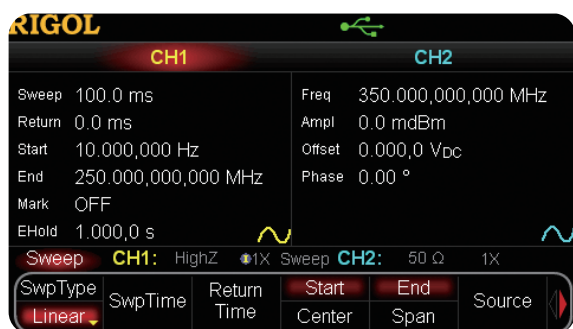

Sweep

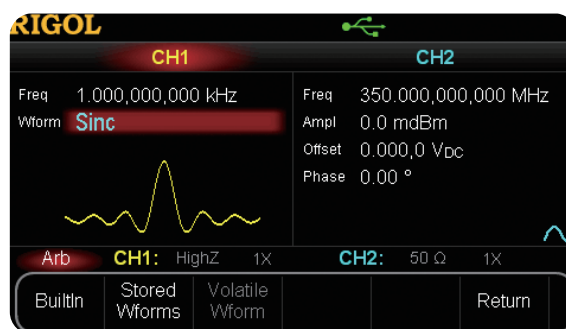

ARB

► Specification

All the specifications can be guaranteed if the following two conditions are met unless where noted.

- The generator is within the calibration and has performed self-calibration.
- The generator has been working continuously for 30 minutes at specified temperature (18°C ~ 28°C).

All the specifications are guaranteed unless those marked with "typical".

Model	DG5352	DG5252	DG5102	DG5072
	DG5351	DG5251	DG5101	DG5071
Channel	2/1	2/1	2/1	2/1
Maximum Frequency	350 MHz	250 MHz	100 MHz	70 MHz
Sample Rate	1 GSa/s			
Waveforms				
Standard Waveforms	Sine, Square, Ramp, Pulse, Noise			
Arbitrary Waveforms	Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, Dual-Tone, DC			

Frequency Characteristics				
Sine	1 μ Hz to 350 MHz	1 μ Hz to 250 MHz	1 μ Hz to 100 MHz	1 μ Hz to 70 MHz
Square	1 μ Hz to 120 MHz	1 μ Hz to 120 MHz	1 μ Hz to 100 MHz	1 μ Hz to 70 MHz
Ramp	1 μ Hz to 5 MHz	1 μ Hz to 5 MHz	1 μ Hz to 3 MHz	1 μ Hz to 3 MHz
Pulse	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz
Noise	250 MHz Bandwidth			
Arb	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz	1 μ Hz to 50 MHz
Resolution	1 μ Hz			
Accuracy	± 1 ppm, 18 °C to 28 °C			

Sine Wave Spectrum Purity				
Harmonic Distortion	Typical (0 dBm) ≤ 100 MHz: < -45 dBc > 100 MHz: < -35 dBc	Typical (0 dBm) ≤ 100 MHz: < -45 dBc > 100 MHz: < -35 dBc	Typical (0 dBm) ≤ 100 MHz: < -45 dBc	Typical (0 dBm) \leq 70MHz: < -45 dBc
Total Harmonic Distortion	$< 0.5\%$ (10 Hz to 20 kHz, 0 dBm)			
Spurious (non-harmonic)	Typical (0 dBm) ≤ 100 MHz: < -50 dBc > 100 MHz: -50dBc+6dBc/octave	Typical (0 dBm) ≤ 100 MHz: < -50 dBc > 100 MHz: -50dBc+6dBc/octave	Typical (0 dBm) \leq 100MHz: < -50 dBc	ypical (0 dBm) \leq 70MHz: < -50 dBc
Phase Noise	Typical (0 dBm, 10 kHz deviation) 10 MHz: < -110 dBc			

Signal Characteristics				
Square				
Rise/Fall Time	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 2.5 ns	Typical Value (1Vpp) < 3 ns	Typical Value (1Vpp) < 4 ns
Overshoot	Typical Value (1Vpp) $< 5\%$			
Duty Cycle	≤ 10 MHz: 20.0% to 80.0% 10 MHz to 40 MHz: 40.0% to 60.0% > 40 MHz: 50.0% (fixed)			
Non-symmetry	1% of period + 5 ns			
Jitter (rms)	Typical Value (1Vpp) ≤ 30 MHz: 10ppm+500 ps > 30 MHz: 500 ps			

Ramp				
Linearity	≤ 0.5% of peak output			
Symmetry	0% to 100%			
Pulse				
Period	20 ns to 1000000 s			
Pulse Width	4 ns to 1000000 s			
Leading/Trailing Edge Time	2.5 ns to 1 ms	2.5 ns to 1 ms	3 ns to 1 ms	4 ns to 1 ms
Overshoot	<5%			
Jitter (rms)	Typical Value (1Vpp)			
	10 ppm+500 ps			

Arb				
Waveform Length	Normal Mode: 2 to 16Mpts			
	Play Mode : 2 to 128Mpts			
Vertical Resolution	14 bits			
Mode	Normal Mode, Play Mode			
Sample Rate	Normal Mode (Waveform Length is from 2 to 16Mpts): 1G Sa/s (fixed)			
	Play Mode (Waveform Length is from 2 to 128Mpts): ≤ 1 G Sa/s (variable)			
Minimum Rise/Fall Time	Typical Value (1Vpp)			
	≤ 3 ns			
Jitter (rms)	3 ns			
Interpolation Method	Close, Linear, Sinc			
Edit Method	Edit Point, Edit Block			
Non-Volatile Memory	1G Bytes			

Output Characteristics				
Amplitude (into 50 Ω)				
Range	≤ 100 MHz: 5 mVpp to 10 Vpp	≤ 100 MHz: 5mVpp to 10Vpp	5mVpp to 10Vpp	5mVpp to 10Vpp
	≤ 300 MHz: 5 mVpp to 5 Vpp	≤ 250 MHz: 5mVpp to 5Vpp		
	≤ 350 MHz: 5 mVpp to 2 Vpp			
Accuracy	Typical (1 kHz Sine, 0 V Deviation, >10 mVpp, Auto)			
	$\pm 1\%$ of setting ± 1 mVpp			
Amplitude	<10 MHz: ± 0.1 dB	10MHz: ± 0.1 dB	<10 MHz: ± 0.1 dB	<10 MHz: ± 0.1 dB
Flatness	10MHz to 60MHz: ± 0.2 dB	10MHz to 60MHz: ± 0.2 dB	10MHz to 60MHz: ± 0.2 dB	10MHz to 60MHz: ± 0.2 dB
(relative to 100	60MHz to 100MHz: ± 0.4 dB	60MHz to 100MHz: ± 0.4 dB	60MHz to 100MHz: ± 0.4 dB	60MHz to 70MHz: ± 0.4 dB
kHz, 1.25Vpp Sine	100MHz to 250MHz: ± 1.0 dB	100MHz to 250MHz: ± 1.0 dB		
wave,	>250 MHz: ± 1.5 dB			
50 Ω)				
Units	Vpp, Vrms, dBm, High Level, Low Level			
Resolution	0.1 mV or 4 digits			

Offset (into 50 Ω)	
Range	± 5 Vpk ac + dc
Accuracy	1% of setting + 5mV + 0.5% of amplitude
Waveform Output	
Impedance	50 Ω (typical)
Isolation	42 Vpk max. to Earth
Protection	Over-temperature protected, Short-circuit protected, Overload relay automatically disables main output

FH Characteristic				
FH Bandwidth	1.5 MHz to 250 MHz	1.5 MHz to 250 MHz	1.5 MHz to 100 MHz	1.5 MHz to 70 MHz
FH Rate	1 Hop/s to 12.5M Hop/s			
Frequency Point Numbers	4096			
Sequence Length	4096			

Modulation Characteristics	
Modulation Types	AM、FM、PM、ASK、FSK、PSK、PWM、IQ

AM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Depth	0% to 120%

FM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)

PM	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Phase Deviation	0° to 360°

ASK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)

FSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)

PSK	
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)
Source	Internal/External
Modulating Waveforms	Square with 50% duty cycle (2 mHz to 1 MHz)

PWM	
Carrier Waveform	Pulse
Source	Internal/External
Modulating Waveforms	Sine, Square, Ramp, Noise, Arb (2 mHz to 50 kHz)
Width Deviation	0% to 100% of Pulse Width

IQ				
Carrier Waveform	Sine (max. 200 MHz)	Sine (max. 200 MHz)	Sine (max. 100 MHz)	Sine (max. 70 MHz)
Source	Internal/External			
Code Pattern	PN Sequence, 4 bits code pattern, User			
IQ Mapping	4QAM, 8QAM, 16QAM, 32QAM, 64QAM, BPSK, QPSK, OQPSK, 8PSK, 16PSK, User			
Code Rate	1 bps to 1 M bps			

Burst Characteristics				
Carrier Waveforms	Sine, Square, Ramp, Pulse, Noise, Arb (except DC)			
Carrier Frequency	1 μHz to 120 MHz	1 μHz to 120	1 μHz to 100 MHz	1 μHz to 70 MHz
Burst Count	1 to 1 000 000 or Infinite			
Start/Stop Phase	0° to 360°			
Internal Period	1 μs to 500 s			
Gated Source	External Trigger			
Trigger Source	Internal, External or Manual			
Trigger Delay	0 ns to 85 s			

Sweep Characteristics				
Carrier Waveforms	Sine, Square, Ramp, Arb (except DC)			
Type	Linear, Log or Step			
Direction	Up or Down			
Start/Stop Frequency	1 μ Hz to 250 MHz	1 μ Hz to 250 MHz	1 μ Hz to 100 MHz	1 μ Hz to 70 MHz
Sweep Time	1 ms to 300 s			
Hold/Return Time	0 ms to 300 s			
Trigger Source	Internal, External or Manual			
Marker	Falling edge of Sync signal (programmable)			

Programming Time				Trigger Output	
Configuration Times (typical)				Level	TTL-compatible
	USB2.0	LAN	GPIB	Pulse Width	> 60 ns (typical)
Function Change	500ms	510ms	510ms	Maximum Rate	1MHz
Frequency Change	50ms	50ms	50ms	Clock Reference	
Amplitude Change	300ms	310ms	310ms	Phase Offset	
Select User Arb	500ms	510ms	510ms	Range	0° to 360°
Arb Download Times (binary transfer)				Resolution	0.001° (arb waveform), 0.03° (other waveforms)
1 Mpts/s					
Note: Download times do not include setup or output time.					


Trigger Characteristics		External Reference Input	
Trigger Input		Lock Range	10 MHz \pm 50 Hz
Level	TTL-compatible	Level	80 mVpp to 10 Vpp
Slope	Rising or falling (selectable)	Lock Time	< 2 s
Pulse Width	> 50 ns	Internal Reference Output	
Latency	Sweep: <100 ns (typical)	Frequency	10 MHz
	Burst: <300 ns (typical)	Level	632 mVpp (0 dBm), nominal value
		Sync Output	
		Level	TTL-compatible
		Impedance	50 Ω , nominal value

General Specifications

Power	
Power Voltage	100-127 V, 45-440Hz 100-240 V, 45-65Hz
Power Consumption	Less than 125 W
Fuse	250V, T3A
Display	
Type	4.3-inch TFT LCD
Resolution	480 Horizontal \times RGB \times 272 Vertical Resolution
Color	16 M color
Environment	
Temperature Range	Operating: 10 $^{\circ}$ C to 40 $^{\circ}$ C Non-Operating: -20 $^{\circ}$ C to 60 $^{\circ}$ C
Cooling Method	Cooling by fans compulsively
Humidity Range	Less than 35 $^{\circ}$ C: \leq 90% Relative Humidity (RH) 35 $^{\circ}$ C to 40 $^{\circ}$ C: \leq 60% Relative Humidity (RH)
Altitude	Operating: Less than 3000 meters Non-Operating: Less than 15000 meters
Mechanical	
Dimensions (W \times H \times D)	230 mm \times 106 mm \times 501 mm
Weight	with no package: 4.3 kg with package: 5.84 kg
Interfaces	USB Host (2), USB Device, GPIB, LAN
IP Protection	IP2X
Calibration Interval	Recommend 1 year for standard interval

► Ordering Information

	Description	Order Number
Model	DG5352 (350 MHz, dual-channel)	DG5352
	DG5351 (350 MHz, single channel)	DG5351
	DG5252 (250 MHz, dual-channel)	DG5252
	DG5251 (250 MHz, single channel)	DG5251
	DG5102 (100 MHz, dual-channel)	DG5102
	DG5101 (100 MHz, single channel)	DG5101
	DG5072 (70MHz, dual-channel)	DG5072
	DG5071 (70MHz, single-channel)	DG5071
Standard	Power Cord	-
Accessories	USB Cable	CB-USB
	BNC Cable (1 meter)	CB-BNC-BNC-1
	Quick Guide (Hard Copy)	-
	Resource CD (including User's Guide and Application Software)	-
Options	SMB(F) to BNC(M) Cable (1 meter)	CB-SMB(F)-BNC(M)-1
	Frequency Hopping Module	DG5-FH
	Logic Signal Output Module	DG-POD-A
	Power Amplifier	PA1011
Optional	SMB(F) to SMB(F) Cable (1 meter)	CB-SMB(F)-SMB(F)-1
Accessories	SMB(F) to BNC(F) Cable (1 meter)	CB-SMB(F)-BNC(F)-1
	40 dB Attenuator	ATT-40dB
	Rack Mount Kit	RMK-DG-5

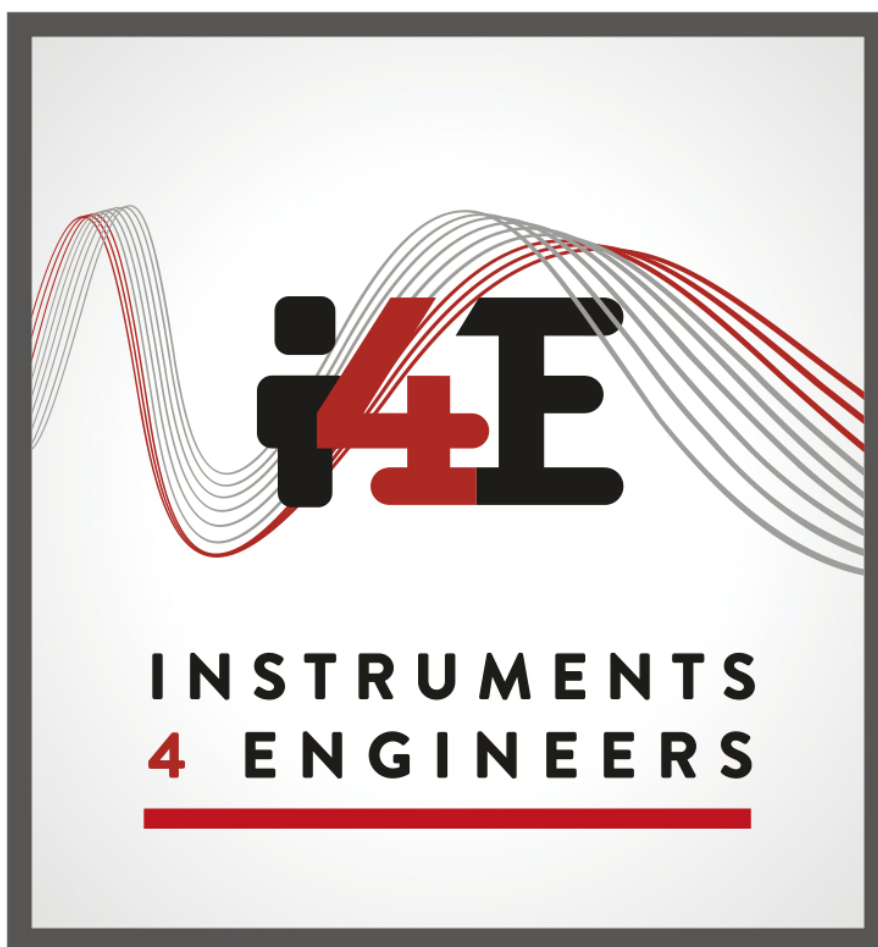

www.instruments4engineers.com